


- Professional makes classics
- Development production marketing integration
- SAW &PCAP&IR touch screen
- 3 years warranty



32 " Touch Monitor

TSD touch monitor are the most economic touch solutions which designed and developed for OEM and system intergrationand widely used in retail, self-service, gaming and entertainment applications.

Established in 2006, TSD technology is a leading touch solution provider in kun-Shan, China. Products include PCAP and SAW touch screen, open frame touch monitor, desktop touch monitor and All-in-one touch computer.We concentrate on design -ing and manufacturing reliable, durable and cost competitive products.

As an outstanding china touchscreen provider, we have experienced electronic engineers and technical experts of the industry who are determined to lead the touch screen industry into a new era of information technology. We have been granted ISO9001,CE, FCC, Rohs etc. certifications.

Product Brief

key technology

Waterproof function: Excellent waterproof performance reach IP65 rate.Add waterproof and dust proof strip between capacitive scre's and aluminum frame. This strip is made of EVA and double-sided tape without substrate material.

Highly transparent EVA material has good capability of withstand low temperature and water resistance and no effect on appearance

Double-sided tape without substrate has perfect waterproof performance which can adhere object well and prevent the drop.

Good dimensional stability, can be applied to a wider temperature range and harsh surroundings.

Architectural design: True flatscreen frame made of SPCC material. Through high temperature dusting, the black powder even cover the aluminum frame surface. Toughened and frame printed in black capacitive screen who connecting with the black aluminum frame fully.The capacitive screen with pure black edge embedded into the black appearing frame seamless, showing a pure black effect.

Key structure

Support multi touch function A finger or touch pen USB touch interface, plug and play VGA/DVI/HDMI display interface Toughened glass capacitive screen 16:9 wide display screen Free optional accessories


Application

Finance Gaming Transportation Advertisement Trade Post and telecommunications Tax revenue Insurance

Version: A0

www.tsd-tech.com

Product Drawing

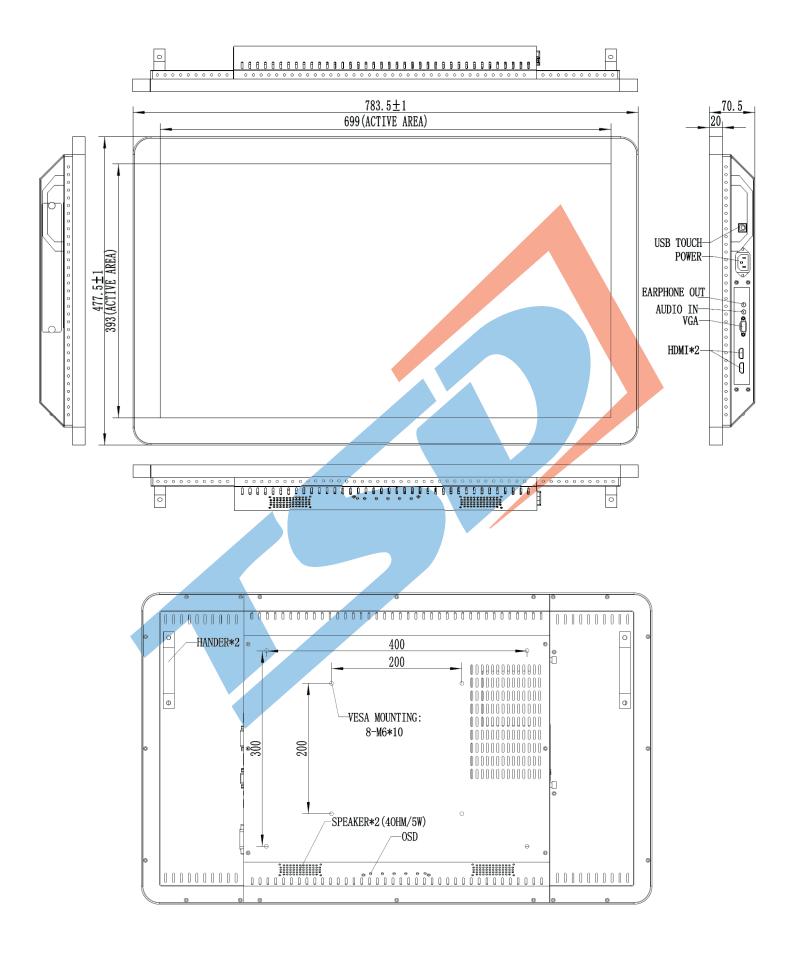

www.tsd-tech.com

Technical parameters

Display specification				
Model	IDS320			
Display size	16:9			
Active area	698.4 (W)mm x 392.9 (H) mm			
Native resolution	1920x1080@60Hz			
Pixel pitch	0.36375(mm) x 0.36375(mm)			
Colors	16.7M			
Brightness(typical)	LED panel: 450 nits			
	Display: 414 nits			
Contrast ratio(typical)	3000:1			
Response time(typical)	8 ms			
Viewing angle(typical)	R/L:89/89 (typ) U/D:89/89 (typ)			
Input interface	VGA, HDMI			
OSD	Contrast, Brightness, Horizontal vertical image size and position, Color temperature,The language selection, RESET, Exit OSD.			
Touch Specifications				
Touch screen	32 " PCAP			
Touch point	10 points			
Touch accuracy	2mm			
Minimum touch body	Ø7mm			
Touch activation force	10g			
Touch response time	10ms (typ)			
IC	ILITeK			
Material	3 mm strengthen glass			
Surface durability	Mohs' 7H			
Light transmission	86%			
Touch resolution	4096*4096			
Input method	Finger、Touch pen			
Expected life performance	35,000,000 times			

Technical parameters

Other Specifications				
Power supply	DC: +12VDC ±5% (Adapter input:AC 100V-240V)			
IP(touch screen with frame)	IP 65			
MTBF	50,000h			
Dimensions	Product: 477.5mm*783.5mm*70.5mm			
	Package: 637.0mm*937.0mm*207.0mm			
Weight	Product: 18kg			
	Package: 25kg			
Temperature	Operating: 0° C ~ 40°C			
	Storage: -20° C ~ 60°C			
Humidity	Operationg: 20%~80%			
numulty	Storage: 10%~90%			
	Signal Cables	Connector	USBA-USBB	
		Length	1.8 m ± 30mm	
		Color	Gray white	
	VGA Cable	Туре	D-SUB 15Pin	
Accessories(standard)		Length	1.8 m ± 30mm	
		Color	Black	
		Туре	American three plug 18/3C + SJT 105 degrees C	
	Power Cord	Length	1.8 m ± 30mm	
		Color	Black	
	DVI Cord HDMI Cord	Connector	Double header 24+1	
Accessories(optional)		Length	1.8 m ± 30mm	
		Color	Black	
		Туре	HDMI1.3 Туре А-Туре А	
		Length	1.8 m ± 30mm	
		Color	Black	
	Audio Cord	Туре	1-1,A-A 1.5m	
		Length	3.5 m ± 30mm	
		Color	Black	
	DP Cord	Connector	DP A-HDMIA	
		Length	1.8 m ± 30mm	
		Color	Black	